



Edge EZ Module **Cummins 1998.5-2002 Dodge ®**

Manual Version 011305

Thank you for purchasing the Edge Module for the 24 Dodge Valve Cummins®. The Edge has been developed and produced of the highest quality to ensure the best performance for years to come. If you have any concerns or questions please contact us.

The Edge Module is a high performance product

It is strongly recommended that EGT gauges and boost gauges be installed with the use of this product.

THIS PRODUCT MUST BE REMOVED WHEN TAKING VEHICLE TO VEHICLE DEALERSHIP OR OTHER SERVICE FACILITY!!

LEAVING PRODUCT INSTALLED MAY AFFECT DEALER DIAGNOSTIC ANALYSIS AND SCAN TOOL FUNCTIONS!!

The installation of this product indicates that the BUYER has read and understands this agreement as well as the “disclaimer of liability” agreement contained at the end of this document and accepts its terms and conditions.



Installation Instructions

IMPORTANT: Read all Disclaimer, Warranty, and Installation Instructions before installing product

Items Required:

Pliers
Flat tip Screwdriver
1/2” Wrench
3/8” Drive Ratchet & Sockets
1/4” Socket
5/16” Socket
7/16” Deep Well Socket

Supplied Items:

1. *Edge EZ Module*
2. Three Wire Ties
3. Two Velcro Strips
4. One Hose Clamp
5. One 90° Brass Fitting

Edge EZ Module Installation Instructions

Please read these instructions through completely and thoroughly understand each step prior to installation.


Module Installation

1. The *Edge EZ Module* can mount on the flat black plastic fuse box cover located on the driver's side fender. Adhere the module using the supplied velcro, allowing enough harness movement for removal of the cover.

Data Link Connection

2. The Data Link connector is located in different locations based on the year of the truck:

- 98.5-99 the triangle shaped connector is located on the drivers side of the engine in the wiring harness near the power steering pump
- 2000-2001 the three prong flat connector is located on top of the fuel lift pump that is located on the driver's side of the engine directly

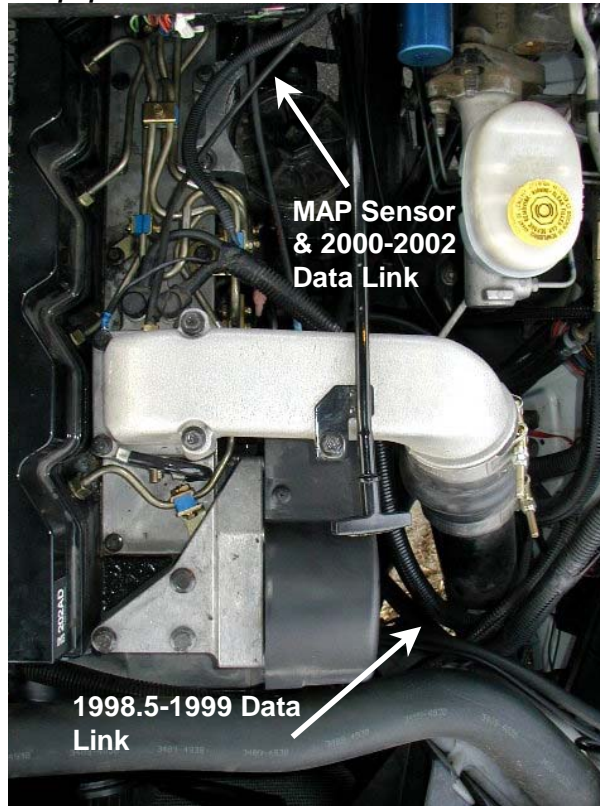

- below the MAP sensor, note: on some 2001 truck's the connector is located on the drivers side of the engine in the wiring harness near the power steering pump
3. A plug is installed in the data link connector on the truck to resist corrosion, remove this and install the supplied connector.

MAP Connection

4. Connect the supplied MAP sensor wiring harness to the supplied main wiring harness in the engine compartment. Disconnect the stock wiring harness at the boost sensor located to the rear of the fuel filter housing near the top of and on the engine block. Plug the supplied MAP sensor connector into the stock engine boost sensor and the stock engine wiring harness connector into the supplied MAP sensor connector. The MAP sensor shown in the image is for a 2001, the 1998.5-2000 are a different sensor but in the same location.

Boost Elbow Installation (Optional)

The installation of the brass elbow permits turbo boost pressures of greater than 20 psi without the wastegate opening. The *Edge EZ Module* will operate equally well with or without this installed.

5. Using the 5/16" socket, loosen the two clamps securing the air induction hose to the air filter housing and the turbo inlet. Remove the hose and set it aside.
6. Using the pliers, remove the crimp style clamp from the hose on the brass fitting located on the now exposed lower front side of the turbocharger. Remove the hose from the brass fitting and dispose of the crimp style clamp.
7. Using the 7/16" wrench, unscrew the stock brass fitting out of the turbocharger housing. Using the 7/16" wrench, install the supplied brass fitting, tighten-be careful not to over-tighten. Slip the supplied hose clamp onto the stock hose, install the stock hose onto the supplied brass fitting and tighten the hose clamp with the 1/4" socket. Reinstall the stock air hose onto the air filter housing and turbocharger inlet. Using the 5/16" socket, tighten both clamps securely.
8. Using the 7/16 deep socket tighten all of the intercooler hose clamps on the air intake.

Note: On 2001 auto's turbos, the wastegate is a solid line and does not have a brass elbow to be replaced


Final Inspection and Operation

9. Recheck all connections, fittings and fasteners for a properly secure installation.
10. Using the supplied wire ties, secure the wiring harness from possible damage.


Low Boost Fuel Adjustment

The *Edge EZ Module* features 3 different levels of low boost fueling. This allows one to eliminate excessive smoke that can occur at low turbo boost if other modifications are also installed. The *Edge EZ Module* is set default to level 3, the most responsive.


1. To change settings remove the front panel by using an allen wrench to remove the two screws.
2. Below the cover there are 3 jumper settings, a jumper will be positioned in the rightmost position if no setting change has been made.
3. This jumper can be removed and repositioned in either of the other two locations to achieve the desired response as shown below.



Setting 3 – Most responsive
(For trucks without injectors or
if smoke is not a concern)



Setting 2 Decreased Low Boost
Fueling (For trucks with
moderate injectors)



Setting 1 –2 Decreased Low
Boost Fueling (For trucks with
large injectors)

Power Gains

The following power gains are representative of an actual test vehicle. Power gains may vary somewhat on a different vehicle or in different geographic settings.

	Horsepower	Torque
Level 1:	60	160
Level 1:	63	170
Level 3:	65	180

Technical Support: (801) 476-3343

To expedite your support call, please have part number (i.e., EAF2100A), version number, and Date of Manufacture ready prior to calling support.

THIS IS A HIGH PERFORMANCE PRODUCT. USE AT YOUR OWN RISK.

Do not use this product until you have carefully read the following agreement.

This sets forth the terms and conditions for the use of this product. The installation of this product indicates that the BUYER has read and understands this agreement and accepts its terms and conditions

DISCLAIMER OF LIABILITY

Edge Products Inc. and its distributors, jobbers, and dealers (hereafter **SELLER**) shall in no way be responsible for the product's proper use and service. THE BUYER HEREBY WAIVES ALL LIABILITY CLAIMS.

The **BUYER** acknowledges that he/she is not relying on the **SELLER's** skill or judgement to select or furnish goods suitable for any particular purpose and that there are no liabilities which extend beyond the description on the face hereof and the **BUYER** hereby waives all remedies or liabilities, expressed or implied, arising by law or otherwise, (including without any obligations of the **SELLER** with respect to fitness, merchantability and consequential damages) or whether or not occasioned by the **SELLER's** negligence.

The **BUYER** is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications and agrees to hold the **SELLER** harmless from any damage resulting from failure to adhere to such specifications.

The **SELLER** disclaims any warranty and expressly disclaims any liability for personal injury or damages. The **BUYER** acknowledges and agrees that the disclaimer of any liability for personal injury is a material term for this agreement and the **BUYER** agrees to indemnify the **SELLER** and to hold the **SELLER** harmless from any claim related to the item of the equipment purchased. Under no circumstances will the **SELLER** be liable for any damages or expenses by reason of use or sale of any such equipment.

The **BUYER** is responsible to obey all applicable federal, state, and local laws, statutes, and ordinances when operating his/her vehicle, and the **BUYER** agrees to hold **SELLER** harmless from any violation thereof.

The **SELLER** assumes no liability regarding the improper installation or misapplication of its products.

It is the installer's responsibility to check for proper installation and if in doubt, contact the manufacturer.

The **SELLER** recommends that the **BUYER** temporarily remove this product from his/her vehicle when having the vehicle serviced by a dealership or other service facility. Failure to do so may cause erroneous diagnostic readings or misdiagnosis of vehicle problems. The **SELLER** assumes no liability for failure to do so.

LIMITATION OF WARRANTY

Edge Products Inc. (hereafter "**SELLER**") gives Limited Warranty as to description, quality, merchantability, fitness for any product's purpose, productiveness, or any other matter of **SELLER's** product sold herewith. The **SELLER** shall be in no way responsible for the product's open use and service and the **BUYER** hereby waives all rights other than those expressly written herein. This Warranty shall not be extended or varied except by a written instrument signed by **SELLER** and **BUYER**.

The Warranty is Limited to two (2) years from the date of sale and limited solely to the parts contained within the product's kit. All products that are in question of Warranty must be returned shipping prepaid to the **SELLER** and must be accompanied by a dated proof of purchase receipt. All Warranty claims are subject to approval by Edge Products Inc.

Under no circumstances shall the **SELLER** be liable for any labor charged or travel time incurred in diagnosis for defects, removal, or reinstallation of this product, or any other contingent expenses.

Under no circumstances will the **SELLER** be liable for any damage or expenses insured by reason of the use or sale of any such equipment.

IN THE EVENT THAT THE BUYER DOES NOT AGREE WITH THIS AGREEMENT: THE BUYER MAY PROMPTLY RETURN THIS PRODUCT, IN A NEW AND UNUSED CONDITION, WITH A DATED PROOF OF PURCHASE, TO THE PLACE OF PURCHASE WITHIN SIXTY (60) DAYS FROM DATE OF PURCHASE FOR A FULL REFUND.

THE INSTALLATION OF THIS PRODUCT INDICATES THAT THE BUYER HAS READ AND UNDERSTANDS THIS AGREEMENT AND ACCEPTS ITS TERMS AND CONDITIONS.

AFTERMARKET PRODUCTS AND YOUR VEHICLE'S WARRANTY

Many of our customers ask, "Will your product void my vehicle's manufacturer's warranty?" While the answer is straightforward from a legal standpoint, we also want to educate our customers (and aftermarket consumers) on some industry realities and offer some common sense precautions to minimize your risk.

Consumers of aftermarket products are protected by The Federal Magnusson-Moss Warranty Act. The Act states that if something breaks on your car and you take it in for warranty repair, the dealer must honor your warranty unless they can prove that whatever modifications you have added to your car actually caused the problem.

While as a consumer you have strong legal protection regarding your vehicle's warranty, there is also a practical reality that different automotive manufacturers and dealers have greatly varying views on aftermarket products, in particular those that produce horsepower, such as performance enhancement chips, modified intake manifolds, or aftermarket exhaust systems. There are dealers and manufacturers out there that will use the presence of a horsepower upgrade to void your vehicle's warranty. They will do this regardless of whose product you are using. Any aftermarket company that does not acknowledge this is misleading you.

The bottom line is that while the law protects the consumer and provides for enforcement of the warranty, it is very difficult for most people to hire an attorney and fight a voided warranty. Edge recommends that you **always disconnect and/or remove any performance device or programmer before you take your vehicle to a dealer for any service**, in order not to interfere with Diagnostic equipment.